


www.akfix.com  
info@akfix.com

---

www.akfix-usa.com  
info@akfix-usa.com



-  [twitter.com/AkfixSealants](https://twitter.com/AkfixSealants)
-  [youtube.com/user/AkfixSealants](https://youtube.com/user/AkfixSealants)
-  [instagram.com/AkfixSealants](https://instagram.com/AkfixSealants)
-  [vimeo.com/AkfixSealants](https://vimeo.com/AkfixSealants)

-  [pinterest.com/Akfixsealants](https://pinterest.com/Akfixsealants)
-  [plus.google.com/+AkfixSealantsAdhesives](https://plus.google.com/+AkfixSealantsAdhesives)
-  [facebook.com/AkfixSealantsAdhesives](https://facebook.com/AkfixSealantsAdhesives)
-  [linkedin.com/in/AkfixSealants](https://linkedin.com/in/AkfixSealants)



[www.akfix.com](http://www.akfix.com)  
[www.akfix-usa.com](http://www.akfix-usa.com)

# CONTENTS

## Adhesives

AKFIX PA370	PUR Wood Glue	02
AKFIX 310	Instant Grab (Interior&Exterior)	03
AKFIX 705	Fast Adhesive (Multi Purpose)	03
AKFIX 710	Stone&Marble Kit	04
AKFIX 610	PU Without Nails	04
AKFIX 702	Super Glue (Cyanoacrylate)	05

## Sealants

AKFIX ALLBOND UNIVERSAL	MS Polymer Universal Shore A45	06
AKFIX ALLBOND HIGH TACK	MS Polymer High Tack Shore A55	07
AKFIX 100E	Multi Purpose Silicone	07
AKFIX AS606	Premium Caulk Sealant (Interior & Exterior)	08
AKFIX 905N	Neutral Silicone Sealant (Building & Construction)	08
AKFIX 100D	Kitchen& Bathroom Silicone	09
AKFIX P635	Polyurethane Construction Sealant	09

## Foams

AKFIX 960	Multi Bond Adhesive Foam	10
AKFIX 805	Big Gap Filler PU Foam	11
AKFIX 840	Fire Block Expanding PU Foam	11
AKFIX 840P	Fire Block Expanding PU Gun Foam	11

## Aerosols

AKFIX E70	Penetrating Oil Spray	12
AKFIX E80	Silicone Lubricant	13
AKFIX E90	Anti Spatter Spray	13
AKFIX A40		14

## Industrial & Automotive; Repair, Care, Protective Products

AKFIX C12	Metal Polish	15
HT300	Gasket Maker	15
INDUSTRIAL WIPES		16
AKFIX R110	Break and Clutch Cleaner	16

# ADHESIVES

## PA370 PUR WOOD GLUE



Tough Jobs



One-component, fast curing liquid polyurethane adhesive. It possesses high water resistance and bonding strength.

### PROPERTIES

Fast curing. Low press time. Transparent. Extremely high bond strength on numerous substrates. Conforms to D4 according to DIN EN 204. Easy to use. Very good resistance to chemicals. Excellent resistance to moisture and weather conditions. Nonshrinking. Low odour. Useable in slightly wet substrates.

### APPLICATION

Fixing and gluing wooden elements to other various porous and non-porous elements as wood, metal, concrete, polystyrene foam and other plastics. Furniture and boat production. All bonding applications that need a high water resistance.

CONTENTS	PER BOX
19.75 OZ.	12
44.1 lb.	1

**310****INSTANT GRAB  
(INTERIOR & EXTERIOR)**

Paintable



Green Product



Water-based adhesive used for bonding numerous building materials. It is particularly suitable for DIY users due to solvent-free content and high bonding strength.

**PROPERTIES**

Acrylic dispersion based. Good gap-filling capacity on rough surfaces. Suitable for both indoor and outdoor applications. Weatherproof. Paintable. Low odour. Solvent-free.

**APPLICATION**

Bonding materials such as wood, non-polished stones, concrete, plaster, tiles, panels, synthetic building materials etc. Mounting wooden construction elements, wood and plaster panels, plaster ornaments. Mounting decorative wooden trimmings. Repairing cracks in plaster. Quick repairs on walls and plaster. Suitable surfaces: MDF, Particleboard, Wood, Polystyrene foam, Concrete, Masonry, Tile, Ceramic, Stone, Plasterboard

**705****FAST ADHESIVE  
(MULTI PURPOSE)**

Bonds Within Seconds



Universal Use



Adhesive set which consists of high viscosity cyanoacrylate adhesive and activator.

**PROPERTIES**

High bonding strength. Suitable for use on vertical surfaces as it will not drip or slump. It is particularly suited to bonding difficult substrates which have a porous or uneven nature since it increases bonding strength by preventing the adhesive to be absorbed by the surface.

**APPLICATION**

It is suitable for the bonding of a very wide range of materials, including acidic surfaces and some porous ones, where rapid bonding times are required. Suitable for MDF, wood, chip wood, rubber, most plastics, leather and other common substrates. Especially suitable for the applications where cure speed needs to be accelerated. Although Akfix 705 has a degree of gap filling ability, it is generally recommended for use on close-fitting parts and fairly smooth, even surfaces.

**CONTENTS | PER BOX**

10,5 FL.OZ.

24

2.7 FL.OZ.

36

8.82 OZ.

36

21.16 OZ.

1

55.12 LB.

1

**CONTENTS****PER BOX**

3.38 FL.OZ. + 0.88 OZ.

48

8.45 FL.OZ. + 2.3 OZ.

24

16.9 FL.OZ. + 4.4 OZ.

24



## 710

### STONE & MARBLE FAST ADHESIVE



Bonds Within  
Seconds



High viscosity cyanoacrylate and activators, which is developed especially for bonding materials such as natural stone, marble, granite and decorative stones.

#### PROPERTIES

Ability to bond rapidly in seconds. High bonding power. Thanks to its high viscosity formula, it can be used in vertical places without pour and splash. Activator makes it possible and incredibly fast to bond even porous surfaces.

#### APPLICATION

Utilized in assembly and repairs of parts such as natural stone, marble, granite, wood, MDF and metal. Preferred especially in the applications which require rapid curing.

CONTENTS	PER BOX
3.38 FL.OZ. + 0.88 OZ.	48
8.45 FL.OZ. + 2.3 OZ.	24
16.9 FL.OZ. + 4.4 OZ.	24

## 610

### WITHOUT NAILS PU CONSTRUCTION ADHESIVE



Fast Curing



Single component, fast curing polyurethane based adhesive. It combines high bond strength with fast curing. It's used to bond almost all common building materials.

#### PROPERTIES

Fast curing. Short Clamping Time. Transparent. Extremely high bond strength on numerous substrates. Thixotropic, non-sag, ideal for vertical joints. Low consumption, economical Good filling properties. Conforms to D4 according to DIN EN 204. Easy to use. Very good resistance to chemicals. Excellent resistance to moisture and weather conditions. Nonshrinking. Low odour. Usable in slightly wet substrates.

#### APPLICATION

It is suitable for use in construction and repair applications where a permanent strong bond is required between porous-porous and porous-nonporous surfaces. It can be used for bonding to various kinds of construction materials such as wood, MDF, concrete, metal, polystyrene and polyurethane foam, marble, granite and ceramic etc.

CONTENTS	PER BOX
10.5 FL.OZ.	24
1.7 FL.OZ.	30



**702****SUPER GLUE  
(CYANOACRYLATE)**

Universal Use

High Bonding  
Strength

It provides excellent adherence where extremely fast cure, and/or where penetration is required. Extra low viscosity superfast instant glue based on cyanoacrylate adhesive. It is excellent where extremely fast cure is required and/or where penetration is required.

**PROPERTIES**

Immediate bond. Very high bond strength after a few seconds.

**APPLICATION**

Suitable for glass, rubber, metals, ceramic and many plastics.

**CONTENTS | PER BOX**

560gr | 12

20kg | 1

# SEALANTS

## ALLBOND MS UNIVERSAL



ECO Friendly



Shore A45

ALL MATERIALS &amp; ALL SURFACES



High quality universal hybrid sealant &amp; adhesive based on MS polymer

### PROPERTIES

Waterproof; becomes elastic and soft with air humidity. One Component. Paintable. No bubble formation. No shrinkage. Excellent elasticity and very good adhesion strength. Does not contain solvent, silicone or isocyanate. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION

Connection joints in sheet metal fabrication, sealing of air conditioning systems. Elastic bonding in vibrating constructions Sealing of floor joints and low movement wall joints. Sealing joints in containers, cisterns, silos etc.

### CONTENTS PER BOX

9.8 FL.OZ.	12
20.3 FL.OZ.	12

### COLORS



\* Transparent





## ALLBOND MS HIGH TACK



High Adhesive  
Strength



ECO Friendly



Shore A55

ALL MATERIALS & ALL SURFACES



## 100E MULTI PURPOSE SILICONE



Mold Proof



MS polymer-based, one component, high quality and professional adhesive with high adhesive strength and initial tack. It is suitable for bonding heavy building materials without the use of clamps and/or fixing tape.

### PROPERTIES

Waterproof. Free from solvent and odorless. One Component. Paintable. No bubble formation. No shrinkage. Does not need primer (preliminary test recommended). Excellent elasticity and very good adhesion strength. Does not contain solvent, silicone or isocyanate. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION

It is specially developed as a universal adhesive for bonding various building materials. It is suitable for elastic bonding of panels, profiles and other pieces on the most common substrates such as: stone, concrete, mirrors, glass, plasterboard, PU, PVC, polyester, plastics, email, ceramic, copper, lead, zinc, aluminium, metals, R.V.S., wood, HPL and cement fibre panels etc.

Common application areas are: Wall cladding elements and ceiling panels. Sound isolation panels (mineral wool, wood-wool cement & plastic foams). Thermal isolation panels (PUR, PIR, PS). Casings and frames in building construction. Wooden and plastic laths, ornaments and frames. Doorsteps, window sills, skirting boards and cover plates. Complete construction elements (such as roofing and facade elements) in frames.

#### CONTENTS PER BOX

9.8 FL.OZ.	12
20.3 FL.OZ.	12



#### COLORS



\* Transparent



Acid-curing, one-component silicone sealant for a range of general sealing and glazing applications. It provides a strong adhesion and suitable for use on common non-porous building materials.

### PROPERTIES

Stays permanently elastic after curing. Acetoxy curing system. Excellent adhesion to non-porous surfaces. Resistance to aging, cracking and discoloring. Resistant to many chemicals, cleaning agents and detergents. Can be applied in any season. Typical acetic smell during curing. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION

General sealing and glazing applications. Sealing around windows and doors for insulation and gap filling. Sealing in DIY applications. On bathroom, kitchen and plumbing applications. Sealing electric, telephone etc. sockets and switches.



#### CONTENTS PER BOX

9.5 FL.OZ.	24
2.7 FL.OZ.	36
1.7 FL.OZ.	24/192

#### COLORS



\* Transparent



## AS606

### PREMIUM CAULK SEALANT (INTERIOR & EXTERIOR)



Paintable



Low Odor



## 905N

### NEUTRAL SILICONE (BUILDING AND CONSTRUCTION)



%100 Silicone



UV Resistant



Non Corrosive



One-component general purpose acrylic sealant reinforced with silicone dispersion. AS606 with added silicone provides superior crack-proof durability and adhesion that prevents air, moisture, insect, dust and dirt from passing through expansion joints and cracks.

#### PROPERTIES

Paintable, Interior/exterior use, Permanently flexible, crack proof, Easy water clean-up, Water-proof after curing, Low VOC content, Smooth and easy tooling, Low odor, Excellent adhesion to most porous surfaces such as brick, concrete, wood, drywalls and plaster etc.

#### APPLICATION

Sealing of low and medium movement joints between various construction materials. Sealing window and door frames. Sealing siding and trim. Sealing anywhere a water-proof seal is required. Sealing corner joints. Filling cracks in walls and on ceilings.



Neutral cure, high performance silicone sealant designed for gap filling and sealing in a wide range of use in building and construction. It combines the advantages of outstanding adhesion to building materials and non-corrosive and odorless curing.

#### PROPERTIES

One component, moisture-cured. Excellent primer less adhesion to numerous porous and non-porous substrates. Noncorrosive. Does not react with or corrode common building materials. Excellent weather ability in direct sunlight, rain, snow and ozone. Resistant to temperature extremes (-60 °C to +180 °C). Fast curing. Low modulus, high elasticity. 100% Silicone, solvent less. Very low odor. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

#### APPLICATION


Sealing of connection joints in building industry (brick, wall, concrete, PVC, wood, glass etc.) Weather seal applications. Mounting of windows and doors. Glazing works. Sealing applications in kitchens and bathrooms.

#### CONTENTS PER BOX

10.5 FL.OZ.	24
20.3 FL.OZ.	12
2.7 FL.OZ.	36



#### COLORS



\* Transparent



#### CONTENTS PER BOX

10.5 FL.OZ.	24
-------------	----



#### COLORS



\* Transparent

\*\* Black Aluminium

# 100D

## KITCHEN & BATHROOM SILICONE



Mold Proof



%100 Silicone



Specially formulated for use in production and installation of shower cabins which has no solvent. It's a superior sealant for sealing and glazing applications featuring excellent adhesion and durability.

### PROPERTIES

Conforms to ISO EN 11600-F-20LM. %100 silicone, does not contain any solvent. Cures very fast. Mold-Proof. Antibacterial. No shrinkage. Stays bright and clean. Outstanding resistance to mildew and fungus. Resistant to temperature extremes and aging. Does not crack or discolor. Withstands detergents, cleaning agents and chemicals. Acetoxy curing system. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION

Glazing and bonding in shower cabinets during production. Filling joints between tiles, tub and shower cabin during installation. Filling joints between bath tubs and tiles after production. Waterproofing sinks.

#### CONTENTS PER BOX

10.5 FL.OZ	24
------------	----



TS EN ISO  
11600 -G- 20LM



EN 15651-1

#### COLORS



\* Transparent

# P635

## PU CONSTRUCTION SEALANT



Construction



Paintable



DOORS/WINDOWS/WALLS/DRIVE/WAYS



One-component, medium-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to all typical construction materials such as cement based materials, brick, ceramic, wood, galvanized and painted sheet iron and various plastics.

### PROPERTIES

Possesses permanent elasticity. No sagging - Thixotropic. No surface tackiness after full cure. Do not pick up dirt. No shrinkage. Enhanced storage stability. Can be applied with hand gun and tooled easily. Paintable. Cures bubble-free. 25 % movement capability. Conforms to BS 6920 for the metallic water soluble impurities and is suitable for use in drinking water system. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION

Expansion joints between many different construction materials. Movement and connection joints in floors. Indoor and outdoor applications for pedestrian and traffic areas. Joints between prefabricated construction materials. Sealing and bonding of ventilation ducts, gutters and spouts etc. For expansion joints between pre-cast concrete panels.

#### CONTENTS PER BOX

10.5 FL.OZ.	12
20.3 FL.OZ.	12
10.15 FL.OZ	12



EN 15651-1



#### COLORS



# FOAMS

## 960 MULTI BOND ADHESIVE FOAM



Heat Insulation  
Panels



4 Seasons



One component minimal expanding aerosol polyurethane adhesive foam curing swiftly with moisture. Providing very fast and powerful adhesion for various construction materials, especially highly recommended for heat insulation systems.

### PROPERTIES

Powerful adhesion of polystyrene heat panels (XPS and EPS). Instant adhesion and wall plugging within two hours. More economical. Ready to use in aerosol can. Up to 14 m<sup>2</sup> heat insulation panel adhesion for each can. Minimum expansion during drying period. After cured, no further expansion and shrinkage. A lighter material compared to adhesive mortar. No more extra burden or weight to building. High yield up to 55 liters, depending on the humidity and temperature. Fire Class: E (According to EN 13501-1. It refers to B2 for DIN 4102 Part-1) Usable at low temperature like 0°C. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION

Best for mounting heat insulation panels and filling voids during adhesive application. Advised for wooden type construction materials adhesion to concrete, metal etc. Applications needed minimum expansion. Mounting and isolation for frames of windows and doors.

#### CONTENTS | PER BOX

9.8 FL.OZ. | 12

20.3 FL.OZ. | 12





**805****BIG GAP FILLER  
PU FOAM**

4 Seasons



Excellent Adhesion

**840 / 840P****FIRE BLOCK  
EXPANDING  
PU FOAM**

Fire Rated



Excellent Adhesion



Single-component, moisture-curing and self-expanding aerosol polyurethane foam. It is designed for easy dispensing through the straw adapter included with each can. It does not contain any propellant gases that are harmful to the ozone layer.

**PROPERTIES**

Excellent adhesion & filling capacity and high thermal & acoustical insulation value. Excellent mounting capacity and stability. High expansion rate. Adheres to almost all building materials with the exception of surfaces such as polyethylene, teflon, silicone and surfaces contaminated with oils and greases, mold release agents and similar materials. Mould-proof, water-proof, over paintable. Cured foam dries rigid and can be trimmed, shaped and sanded.

**APPLICATION**

Fixing and insulating of door and window frames. Filling and sealing gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



Self-extinguishable aerosol polyurethane foam for filling, sealing and bonding gaps.

**PROPERTIES**

Rated B2 according to DIN 4102. Excellent adhesion to most building materials. It does not contain any propellant gases that are harmful to the ozone layer. It can be painted after curing. It can be cut and sawn. UL Classified.

**APPLICATION**

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.

**CONTENTS | PER BOX**

9.8 FL.OZ. | 12

20.3 FL.OZ. | 12

**840****CONTENTS | PER BOX**

9.5 FL.OZ. | 24

2.7 FL.OZ. | 36

1.7 FL.OZ. | 24/192

**840P****CONTENTS | PER BOX**

31.75 oz. | 12





## AEROSOLS

## E70

PENETRATING  
OIL SPRAY  
With MoS<sub>2</sub>

High performance penetrating oil enriched with MoS<sub>2</sub>.

## PROPERTIES

Excellent penetrating capability. Penetrates into hard-to-reach areas quickly. Loosen rusted parts and form a protective layer between metal surfaces. Diminish friction. Remove water and protects against moisture. Protects metal parts and surfaces from corrosion. Eases quick disassembly of mechanical components, fittings, assemblies, nuts and bolts and other close tolerance fasteners. Leaves a solid lubricating MoS<sub>2</sub> film. Reduces wear and facilitates future disassembly. MoS<sub>2</sub> reduces friction even elevated temperatures.

## APPLICATION

Seized and rusted nuts and bolts. Locks and hinges. Screwed parts. Equipment disassembly. Corroded fasteners. Valves. Air tools. Chains and conveyors. Agricultural equipment.

## CONTENTS | PER BOX

6.76 FL.OZ.	24
13.5 FL.OZ.	12

## COLORS



# E80

## LUBRICANT SILICONE



Silicone based mould release agent. It shows perfect performance even at very high temperatures.

### PROPERTIES

Due to its silicone content, it provides long working life at high temperatures. Lubricates to reduce friction and eliminate squeaks in all, types of mechanical parts. The product repels water, protects and renews rubber surfaces. Anti-static and anti-corrosive. Do not leave residues. Not water soluble. Non-toxic.

### APPLICATION

As a cleaner and mould release agent in textile plastic and rubber industries. Windshield wiper linkage. Lubricates door locks, trunk lids, brake cables and rubber molding. Interior hinges, slides or springs. Snow blower chutes.

CONTENTS	PER BOX
13.5 FL.OZ.	12



# E90

## ANTI-SPATTER SPRAY



Aerosol product that protects materials and surfaces in welding area against particles spattering during welding process. It ensures a perfect welding operation.

### PROPERTIES

Anti-adhesion product for arc welding. Prevents the adhesion of "projections" on all treated surfaces. Suitable for protecting nozzles, weld units and tools. Not flammable after evaporation of solvent.

### APPLICATION

Used in welding processes due to its ability to prevent adhesion of spattering particles to the around areas and surfaces. Nozzles and shrouds. Torch-es. Workpieces and parts. Jigs. Automatic and semi-automatic welding. Welding robots.

CONTENTS	PER BOX
13.5 FL.OZ.	12



## Akfix A40



Corrosion Inhibitor, Lubricant and Multi Purpose Protector aerosol Spray. It's special formula it combines many properties such as cleaning, lubricating, loosening rusted part, driving out moisture. It can be used in industrial, home and daily labors.

### PROPERTIES

Ultimate penetrating ability. Loosens rusted or corroded bolts, nuts, cables and any other fasteners. Greases and loosens door and window hinges, locks, and other fittings. Decreases frictions and stops squeaks of pedals, chairs, windows, faucets and hinges. Does not contain silicon and any dirty trap additives. Penetrates into humidity, drives it out of surface and dries it fast, thus provides longtime lubricating effect. Protects metal parts against rust. Provides maintenance by penetrating into surface and protects it against dirt. Dissolves tar, gum, adhesive etc. Permeates into grease and dirt and creates a protective film layer on the surface.

### APPLICATION

In all fittings, door and window mechanisms, locks, handles, hinges. For annulling humidity on metallic surfaces of bikes, motorbikes, small motor vehicles, electronic contacts and other home tools such as drills, jigsaws, etc. For loosening and activating rusted and jammed mechanisms. Can be used as protective on surfaces vulnerable to water and rust. For dissolving adhesive materials like tar, gum, adhesive tapes etc. Can be used for cleaning and maintenance of weapons.

CONTENTS	PER BOX
6.75 FL.OZ	24
13.50 FL.OZ	24

### COLORS




\* Yellowish

# INDUSTRIAL & AUTOMOTIVE REPAIR, CARE, PROTECTIVE PRODUCTS



## C12 METAL POLISH

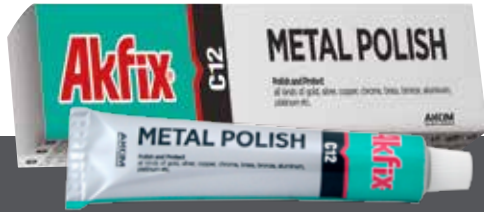

Polish every kind of gold, silver, copper, chrome, brass, bronze, aluminum, platinum and can make a protective film on the surface.

### PROPERTIES

Excellent penetrating capability. Diminish friction. Remove water and protects against moisture. Protects metal parts and surfaces from corrosion.

### APPLICATION

It is well used for cleaning and polishing auto parts, Kitchenware. Tiles. Fiberglass.

## HT300 GASKET MAKER



Excellent  
Heat Resistant



%100 Silicone



High-performance silicone sealant developed for sealing, bonding and repairing works where heat resistance is required. It is an ideal sealant for high temperature construction applications. It reacts with atmospheric moisture to produce a tough, elastic silicone.

### PROPERTIES

Excellent heat resistance after curing up to 250 °C permanently and up to 300 °C temporarily. Acetoxy cure, RTV silicone. 100% silicone. Fast cure, high strength. Resists to mechanical enforcement after curing. Remains flexible at low (-40 °C) and high (+250 °C) temperatures. Will not crack, shrink or become brittle. One component. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION

Sealing and bonding applications in automotives. On heating systems and ovens for sealing/ tightness. Sealing and bonding in stoves. In heating devices. Gaskets in pumps and motors. In sealing chimneys. Other bonding and sealing applications where parts must perform at high temperatures.

### CONTENTS PER BOX

10.48 fl. OZ.	24
1.76 OZ.	24/192
3 OZ.	20/92

### COLORS





## INDUSTRIAL WIPES



Industrial strength hand cleaning wipes that are capable of removing oil, grease, paint, ink and adhesives. The textured side of the wipe will gently but efficiently remove all ingrained contamination. The smooth side of the wipe will effectively retain contamination and will prevent re-soiling of the hands. Hands are clean and dry in one application, all without the use of water.

### PROPERTIES

Non hazardous to user or environment. High absorbency – contamination stays on wipe. Textured material assists cleaning power. Optimum dose of cleaner applied to the wipe. Excellent cleaning power – even on tough contaminants. Convenient, simple and safe to use. Leaves no residue.

### APPLICATION

Hand cleaning. Removing difficult contaminants, such as adhesive, gasket residue, bitumen, silicone, ink, oil, grease, lubricants, paint.

## R110 BRAKE & CLUTCH CLEANER



Powerful cleaning fluid is used to remove oil, grease, dirt and dust from brakes and clutches, aiding in the elimination of brake squeal and clutch slip caused by glazing and contamination. Brake cleaner helps brakes last longer and perform better.

### PROPERTIES

Effectively removes brake fluid, grease, oil and hardened deposits. Reduces disc-brake squeal and clutch chatter. Can be applied without disassembly, saving time and reducing maintenance costs. Evaporates quickly, leaves no residue. Excellent penetration. Stable, non-staining and non-corrosive to metal. Aerosol is equipped with a 360° (upside-down) spray valve and extension tube for added convenience.

### APPLICATION

Perfect for cleaning and degreasing:  
Brake linings. Drums. Cylinders. Brake shoes. Disc brake pads. Discs. Wedge brakes. Springs. Calipers. Clutch discs.

COLOR	PER BOX
20pcs	60

CONTENTS	PER BOX
16.9 FL.OZ.	24